

Mailing / Fulfillment Solutions - Solutions for Inkjet & Tabber Systems

FeedMAX

Overview


Perfect for feeding magazines, self-mailers, postcards, leaflets, flyers, folders and other products

The FeedMAX is ideal for continuous feed applications on in-line bases. Create increased feeder capacity that helps eliminate overhead costs. The included adjustable product guide, our patented Dynamic Rotation Technology™ and “Shaker” plate help keep product square, increase separation and improve the overall product handling.

The FeedMAX-S with registration table, bypasses built in shuttle feeder bases for continuous feed applications. Eliminate limitations on feedable product range and stack height by shingling material on a high capacity conveyor that cascades into the feeder hopper. Included is the jogging wedge that pre-shingles product for consistent separation that helps increase productivity by three times.

Feedable Material – envelopes, flats, self-mailers, postcards, single sheets, magazines, booklets, folders, 8/64 signatures, pamphlets, leaflets, maps, chipboard, cardboard, plastics, flyers.

Standard Features


- Dynamic Rotation Technology® • “Shaker” plate • Six foot autoloader
- External run interfaces • Casters • TUV Certified 

Options

- Registration table (“S”) • 9 foot conveyor length

Products *(ask us about your products)*

Envelopes	Booklets	Chipboard
Flats	Folders	Cardboard
Self-mailers	8/64 signatures	Plastics
Postcards	Pamphlets	Flyers
Single sheets	Leaflets	
Magazines	Maps	

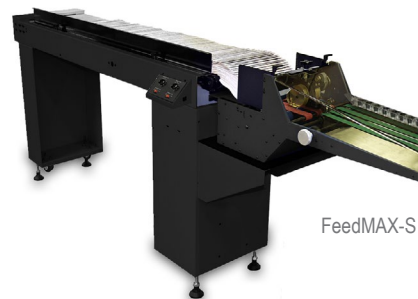

Specifications	
Maximum Product Size	FeedMAX: 15 W x 13 L in (381 x 330 mm)
	FeedMAX-S: 14.5 W x 13 L in (368 x 330 mm)
Minimum Product Size	5 W x 3 L in (127 x 76 mm)
Speed	Variable to 500 ft./min. (152.4 m/min)
Conveyor Length	6, 9 feet (1.83, 2.74 meters)
<i>Other sizes and thickness capabilities available. Contact us for your application.</i>	