

## Mailing / Fulfillment Solutions - Solutions for Inkjet & Tabber Systems

### Belt Turnover

#### Overview


##### *Creating in-line applications with a simple turn*

Easy to integrate and fast to set-up, the Belt Turnover helps increase productivity by turning material directly from your in-line inserter face up to be metered, printed or labeled. Available in either 6" x 9" or 10" x 13" models, each comes equipped with 2 1/4" wide grip gum belts (helping to handle glossy products), clear, durable lexan covers, open cover sensor and an extended support rod, providing greater control (up to 11" wide material). Adjustable belts are included to increase belt to product friction, helping eliminate "slip feeding".


Options - Left to right or right to left product output capabilities.

Feedable Material - Flats, postcards, #10 envelopes, folded booklets.

TUV Certified 

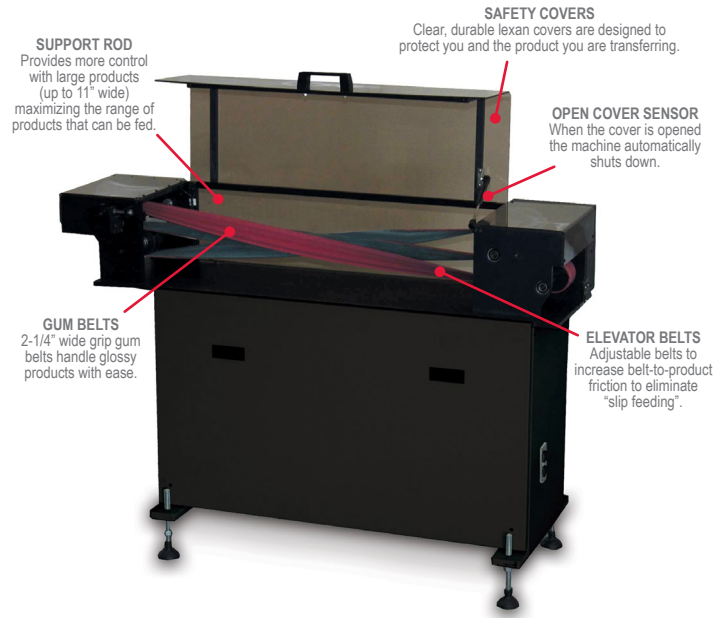

Product coming from an in-line inserter is flipped over, preparing the newly inserted envelope for multiple applications.

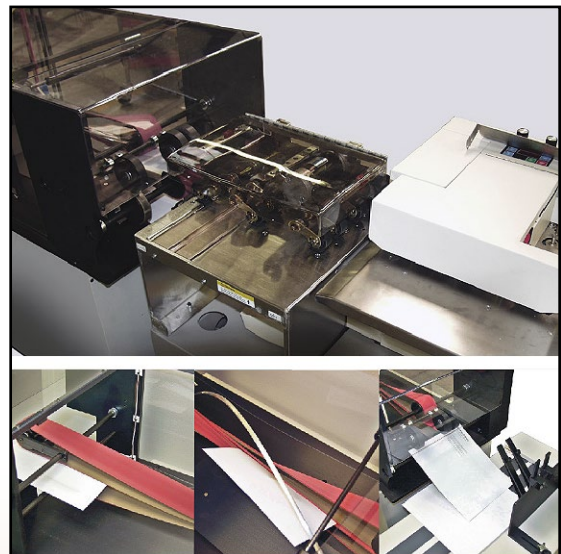

#### Specifications

|                           |   |
|---------------------------|---|
| Maximum Input Height      | 35 in (89 cm)                           |
| Minimum Input Height      | 21 in (53.34 cm)                        |
| Maximum Output Height     | 35 in (89 cm)                           |
| Minimum Output Height     | 32 in (81.28 cm)                        |
| Maximum Product Thickness | .125 in (3.175 mm)                      |
| Maximum Product Width     | 12 in (305 mm)                          |
| Speed                     | 20 to 500 ft./min. (51 to 1270 cm/min.) |
| Utilities                 | 120ac, 60Hz, 3A                         |
| Product Dimensions        | 19.5 W x 35.25 L x 33.25 H in           |
| Weight                    | 49.5 lbs. (22.45 kg)                    |

*Other sizes and thickness capabilities available. Contact us for your application.*