


Streamfeeder Automation Accessories Stand-Alone Shingling Conveyor

Overview

The Stand-Alone Shingling Conveyor provides flexibility and versatility wherever product collection is required. The slow-moving design allows products to be collected in a shingled manner and the amount of shingle can be controlled by the variable speed control. The high-torque drive system is designed to handle large work-loads ensuring years of dependable operation.

Standard Features

Heavy-duty construction • Powder coated steel frame for durability • Variable speed control for shingling control • Long lasting, durable belt (choose from a single 10" wide belt or two 3" wide adjustable belts) • End plate with cut-out for easy and safe removal of collected product • Casters for portability • Non-skid levelers for variable height adjustment • In-line or 90-degree interface to accommodate available floor space

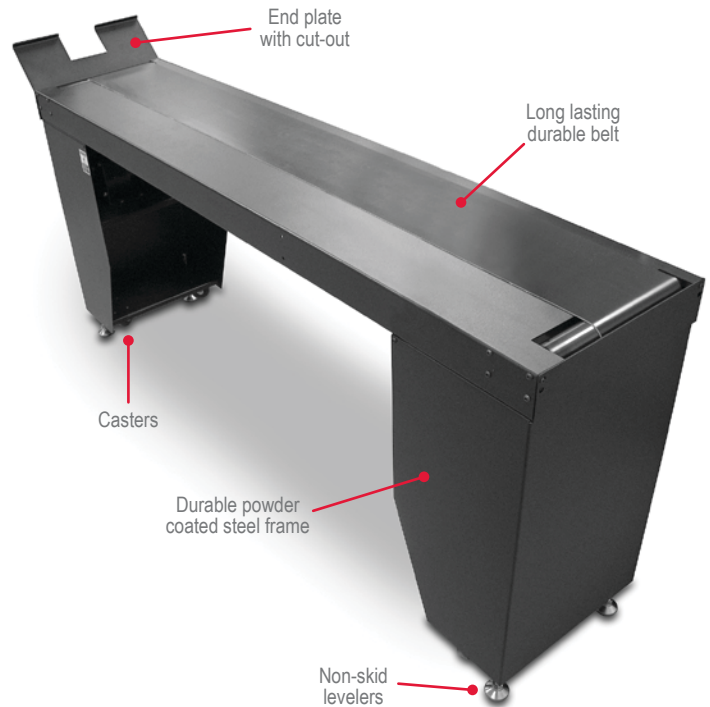

Applications *(ask us about your application)*

Addressing	Verification	Attaching
Labeling	Tabbing	Date Stamping
Scanning	Coding	
Tip-on/Affixing	Printing	

Products *(ask us about your products)*

Sheet Paper	Backer Board	Folded Documents
Manuals	Collapsed Cartons	Boxes
Cardstock	Envelopes	Booklets
Post Cards	Brochures	and more...

Specifications

Maximum Product Size	12 W x 12 L in (305 x 305 mm)*
Minimum Product Size	4 W x 4.0 L in (102 x 102 mm)*
Speed	Variable, 63 feet/minute (19.3m/min)
Utilities	115vac, 50/60Hz, 5A
Discharge Height	29.5-33.5 in (75-85 cm)
Dimensions	72 L x 15.5 W in (183 x 39 cm)
Warranty	One year limited

*Other lengths available. Contact us for your application. Maximum conveyor width is 15 inches.

FOOTPRINT DRAWING AVAILABLE AT:
www.streamfeeder.com/footprints.html
 or scan the QR Code

