

## Streamfeeder Automation Accessories

# AutoStream High Volume Autoloader


### Overview

Designed to increase productivity on high-speed Streamfeeder feeding lines where manual product loading is reducing system efficiency. The unique design provides a "load-low" bed for easy loading of bulk product on edge. The incline section advances and shingles the product to the upper belt section where the products travel into the hopper of the Streamfeeder feeder.

Consistently and automatically load a wide variety of flat and multi-thickness products into all Streamfeeder model feeders. The AutoStream High Volume Autoloader can also be used to automatically load hoppers of other feeders including vacuum shuttle bases and rotary drum feeders.

### Standard Features

Heavy-duty construction • Product load capacity up to 300 lbs. • Easy to use push button controls • Fast and easy setup and changeovers • Tool-less adjustable guides • Optional hydraulic single handle height adjustment with casters

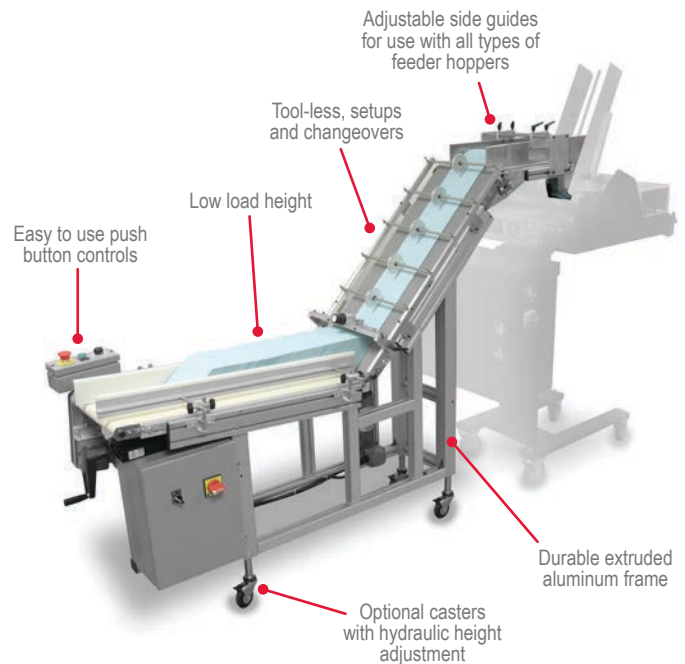

### Applications *(ask us about your application)*

Inkjet Systems	Tip-on Systems	Inserters
Batch Counting	Collators	

### Products *(ask us about your products)*

Sheet Paper	Backer Board	Folded Documents
Manuals	Collapsed Cartons	Folders
Cardstock	Envelopes	Booklets
Post Cards	Brochures	and more...

### Specifications

Maximum Product Size	12 W x 12 L in (305 x 305 mm)
Minimum Product Size	2 W x 3 L in (51 x 76 mm)
Min/Max Product Thickness	.003 - .3125 in (.07 - 8 mm)
Load Conveyor Speed	0-10 ft/min (0-305 cm/min)
Discharge Belt Speed	0-120 ft/min (0-36.5 m/min)
Utilities	115vac, 50/60Hz, 7A
Discharge Height	48-52 in (122-132 cm)
Warranty	One year limited

*Other sizes and thickness capabilities available. Contact us for your application.*

**FOOTPRINT DRAWING AVAILABLE AT:**  
[www.streamfeeder.com/footprints.html](http://www.streamfeeder.com/footprints.html)  
 or scan the QR Code

